




**ARMOUR ★ SAFETY**

Your Safety Solutions Partner

# TECHNICAL DATA SHEET

---

## Loading Platforms

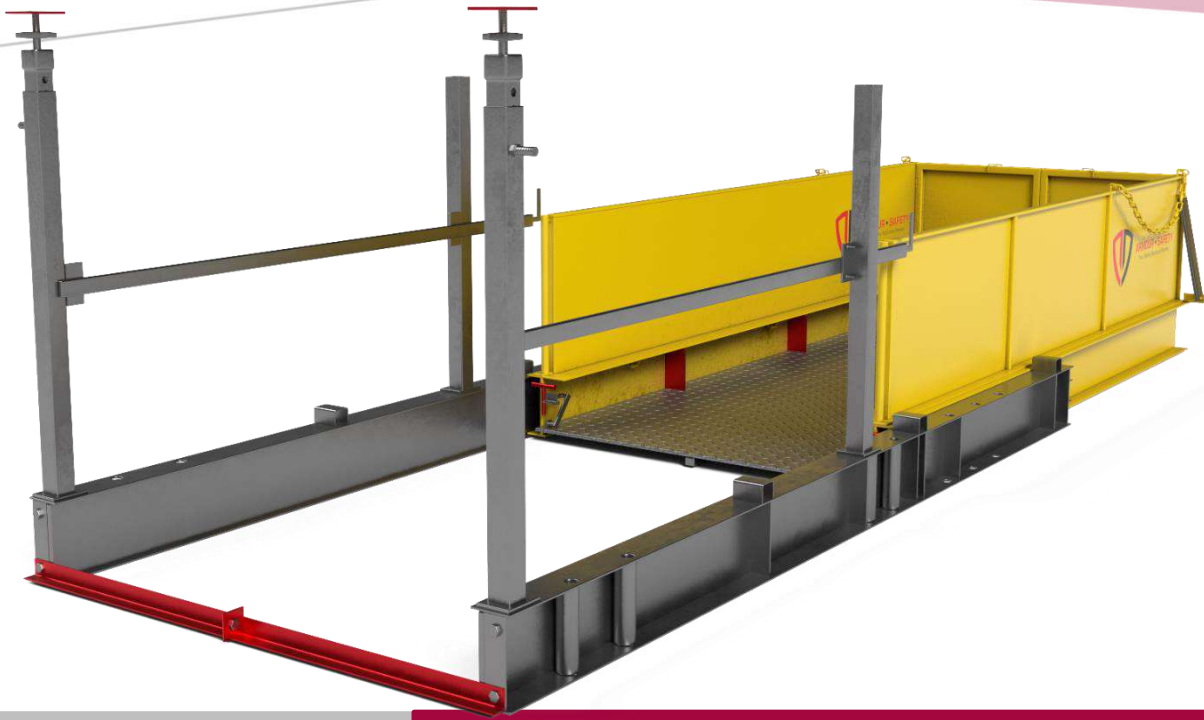

# CERTIFICATE OF CONFORMITY.


THIS IS TO CERTIFY THAT THE LOADING PLATFORMS SUPPLIED BY  
**ARMOUR SAFETY™** HAVE BEEN MANUFACTURED IN COMPLIANCE TO THE  
HIGHEST STANDARDS AND QUALITY

## ARMOUR LOADING PLATFORMS


FIXED | RETRACTABLE | LOADING PLATFORMS

2.5 TONS - SAFE WORKING LOAD

5 TONS - SAFE WORKING LOAD

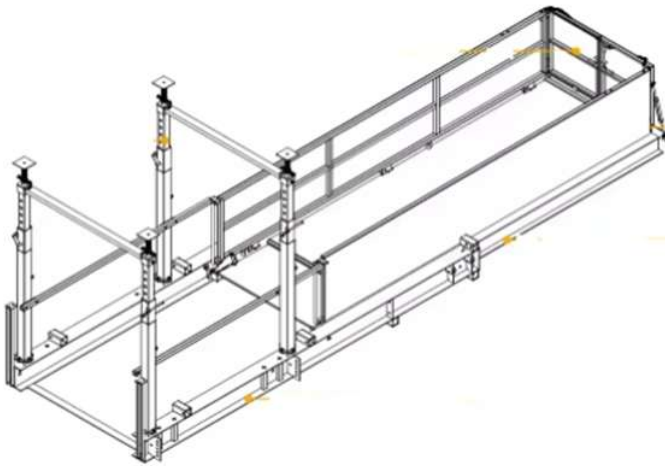

Model	Symbol	Unit	SD 2200-L	SD 2200-H	SD 2600	SD 3200	SD 4200
External width	W1	mm	2200	2200	2600	3200	4200
Internal width	W2	mm	1740	1740	2140	2740	3740
Distance between front and rear prop	W3	mm	2300	2300	2300	2300	2300
Distance between left and right prop	W4	mm	2050	2050	2450	3050	4050
Folded height/Stacking height	H	mm	510/420	510/420	510/420	510/420	510/420
Height of the side panel	H1	mm	1100	1100	1100	1100	1100
Min. prop height	H2 <sub>min</sub>	mm	2400	2400	2400	2400	2400
Max. prop height	H2 <sub>max</sub>	mm	3300	3300	3300	3300	3300
Retracted length	L1	mm	4845	5320	5320	5320	5320
Extend length	L2	mm	7430	8985	8985	8985	8985
Overhang length of stationary frame	L3	mm	1200	1450	1450	1450	1450
Distance between the front prop and the slab edge	L4	mm	1065	1695	1695	1695	1695
Extended length of movable deck	L5	mm	2665	3800	3800	3800	3800
Weight	TM	t	2.1	2.76	2.92	3.25	3.95
Safe Working load (UDL)	SWL	t	2.5	5	5	5	5

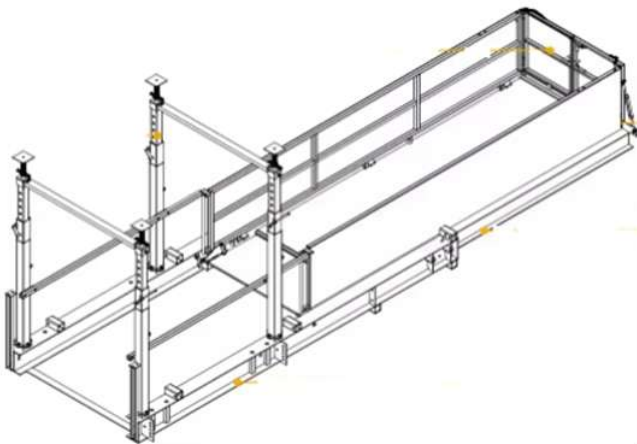

Model	Symbol	Unit	SD 2200-L	SD 2200-H	SD 2600	SD 3200	SD 4200
External width	W1	mm	2200	2200	2600	3200	4200
Internal width	W2	mm	1740	1740	2140	2740	3740
Distance between front and rear prop	W3	mm	2300	2300	2300	2300	2300
Distance between left and right prop	W4	mm	2050	2050	2450	3050	4050
Folded height/Stacking height	H	mm	510/420	510/420	510/420	510/420	510/420
Height of the side panel	H1	mm	1100	1100	1100	1100	1100
Min. prop height	H2 <sub>min</sub>	mm	2400	2400	2400	2400	2400
Max. prop height	H2 <sub>max</sub>	mm	3300	3300	3300	3300	3300
Retracted length	L1	mm	4845	5320	5320	5320	5320
Extend length	L2	mm	7430	8985	8985	8985	8985
Overhang length of stationary frame	L3	mm	1200	1450	1450	1450	1450
Distance between the front prop and the slab edge	L4	mm	1065	1695	1695	1695	1695
Extended length of movable deck	L5	mm	2665	3800	3800	3800	3800
Weight	TM	t	2.1	2.76	2.92	3.25	3.95
Safe Working load (UDL)	SWL	t	2.5	5	5	5	5